

TOP TEN DESIGN TIPS







By Jürgen Hasenauer, Dieter Küper, Jost E. Laumeyer and Ian Welsh

1. Comparison of materials
2. Material selection
3. Wall thickness
4. Ribbing
5. Gate positioning
6. Cost-saving designs
7. General assembly technology
- 8. Welding technology**
9. Tolerances
10. Check list

8. Welding technology

The Best Assembly Techniques – Part II

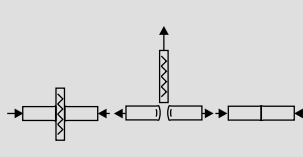Welding technology – In addition to the assembly techniques described in article 7 of this series, many different welding methods can be used to join plastic parts. To ensure low-cost, functionally efficient designs, it is necessary to select a suitable welding method and give careful thought to the required joint geometry at an early stage in the design process.

	Hot-tool	Vibration/Spin	Ultrasonic
Principle			
Welding cycle times	10-20 s	0,2-10 s	0,1-2 s
Advantages	<ul style="list-style-type: none"> – unevennesses in the joint zone (e.g. distortion) are melted away – good reproducibility of welding results – best weld quality – high degree of automation possible 	<ul style="list-style-type: none"> – suitable for welding medium-sized to large parts – suitable for welding plastics sensitive to oxidation 	<ul style="list-style-type: none"> – different variations possible (riveting, flanging, insertion) – shortest cycle times – method can be readily automated and integrated
Limitations	<ul style="list-style-type: none"> – oxidation-sensitive plastics – more flash 	<ul style="list-style-type: none"> – position of the parts to be welded relative to each other – minimum rigidity required (material/part geometry) – defined relative movement required 	<ul style="list-style-type: none"> – suitable only for welding small to medium-sized parts – near-field/far-field an additional influencing factor
Examples	 <p>air-intake hose (inserts)</p>	 <p>air-intake pipe body runner joints</p>	 <p>cigarette lighter</p>

Comparison of different welding methods



Fig. 1

TOP TEN DESIGN TIPS

By Jürgen Hasenauer, Dieter Küper, Jost E. Laumeyer and Ian Welsh

Welded joints are assemblies for permanently connecting plastics parts without additional assembly elements. The choice of welding method depends on several criteria: the geometry of the moulded part and on the materials used, on cost-effectiveness, suitability for integration into the overall production cycle and the mechanical and aesthetic quality requirements for the assembly zone.

Different welding methods

There are many different, cost-effective welding methods suitable for industrial mass production. The methods most frequently used for plastics engineering components are (Fig. 1):

- hot-tool welding
- spin welding
- vibration welding
- ultrasonic welding.

Other methods worth mentioning include:

- high-frequency welding
- induction welding
- hot-gas welding.

New methods are also being developed (e.g. laser welding), but these are not yet widely used in industry.

In all these methods, the assembly operation is carried out by applying heat (melting the surfaces to be joined) and pressure. Heat can be generated directly by contact or radiation, or indirectly by internal or external friction, or by electrical effects.

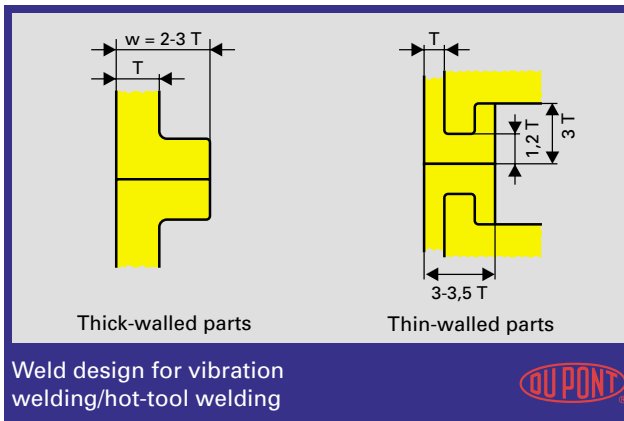


Fig. 2

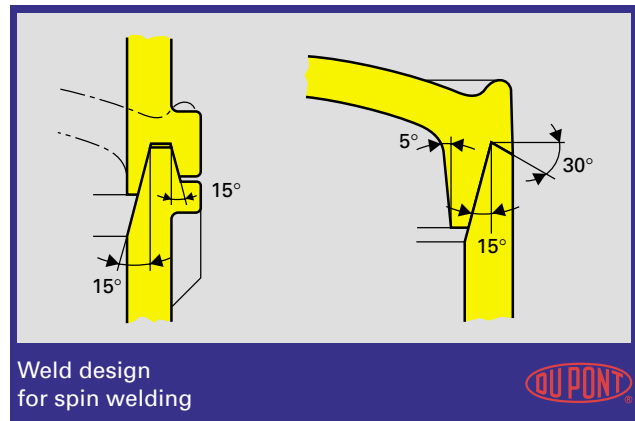


Fig. 3

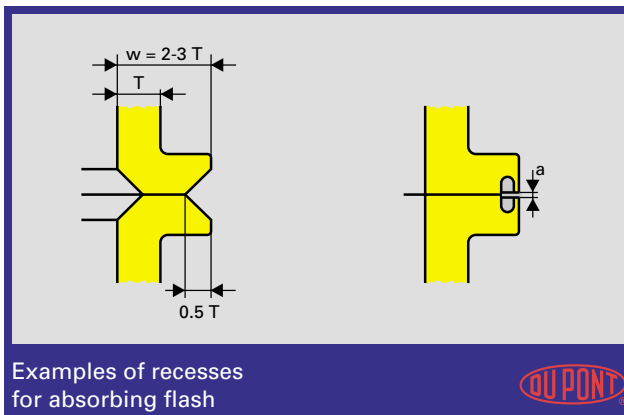


Fig. 4

TOP TEN DESIGN TIPS

By Jürgen Hasenauer, Dieter Küper, Jost E. Laumeyer and Ian Welsh

Choosing the right method

To achieve good, reproducible weld quality, it is necessary to choose a suitable welding method, optimize welding parameters and ensure that the parts to be assembled are correctly designed for the welding method being used. Welding machinery manufacturers supply not only standard equipment but also various special welding units to cater for a wide variety of welding tasks. Before deciding on a welding method, it is advisable to consult the machinery manufacturers or resin suppliers.

Different welding properties

Theoretically, all thermoplastics are weldable, but the welding behaviour of plastics differs considerably in some cases. Amorphous and semi-crystalline polymers cannot be welded together. Plastics that absorb water (e.g. nylon) need to be pre-dried, since moisture leads to poor-quality welds. For best results, nylon parts should either be welded immediately after injection-moulding or kept in a dry state before welding. Resin additives such as glass fibres and stabilizers can also influence welding results. Welded assemblies of unreinforced plastics can attain weld factors close to the strength of the parent material, given suitable process parameters and part design. With glass-fibre-reinforced plastics, loss of strength due to fibre separation or reorientation in the welding zone must be taken into account.

Correct weld design

An essential requirement for high-quality welds is suitable design of the weld profile. The profiles shown in Figures 2 and 3 have proved successful basic designs. If the weld zone additionally has to meet high aesthetic specifications, then special geometry is needed. The diagrams show possible ways of hiding flash by providing recesses to absorb the excess material (Fig. 4). Thin-walled parts need to be designed with a guided fit into each other, so that the necessary welding pressure can be applied without the walls moving out of alignment.

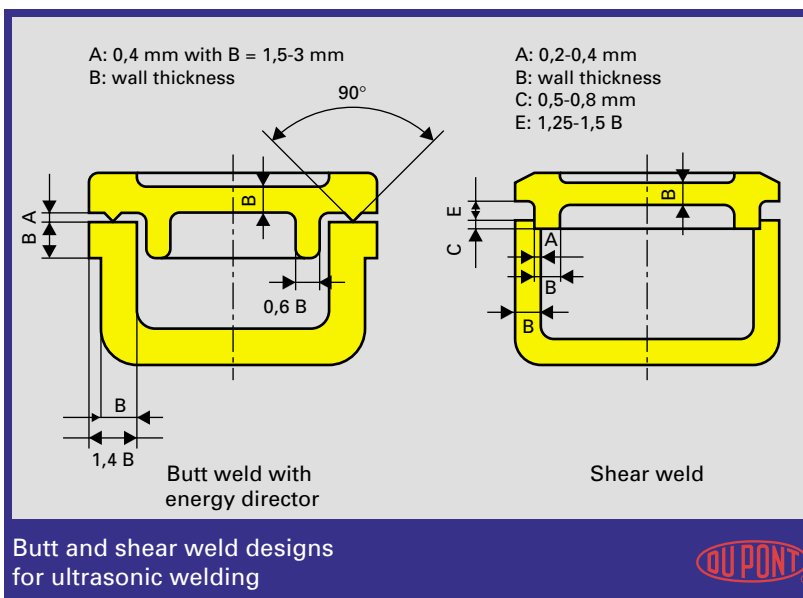


Fig. 5

TOP TEN DESIGN TIPS

By Jürgen Hasenauer, Dieter Küper, Jost E. Laumeyer and Ian Welsh

Special features of ultrasonic welding

Semi-crystalline polymers have a sharply defined melting point, i.e. on application of heat they pass abruptly from the solid to the liquid phase. For ultrasonic welding of semi-crystalline plastics, it is therefore preferable to use shear welds (Fig. 5). For welding amorphous plastics, which have a softening range, the weld design is less critical. Fig. 6 shows diagrams of the near-field and far-field welding methods. These differ in the distance between the contact point where the ultrasonic horn transmits vibrations into the workpiece and the faces to be joined. Generally speaking, near-field welding produces the best results with all plastics but it is essential to use the near-field method for plastics with a low elastic modulus.

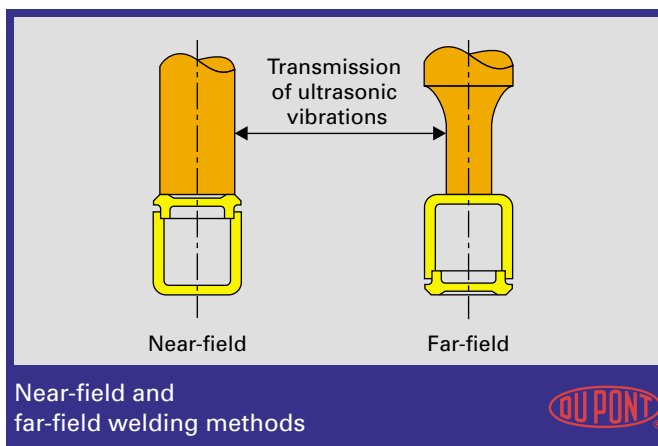


Fig. 6

EUROPE/MIDDLE EAST/AFRICA

Belgique / België
Du Pont de Nemours (Belgium)
Antoon Spinoystraat 6
B-2800 Mechelen
Tel. +32 15 44 14 11
Telefax +32 15 44 14 09

Bulgaria
Serviced by
Biesterfeld Interrowa GmbH & Co. KG.
See under Österreich.

Ceská Republika a
Slovenská Republika
Du Pont CZ, s.r.o.
Pekarska 14/268
CZ-155 00 Praha 5 – Jinonice
Tel. +42 257 41 41 11
Telefax +42 257 41 41 50-51

Danmark
Du Pont Danmark ApS
Skjøtevej 26
P.O. Box 3000
DK-2770 Kastrup
Telefax +45 32 47 98 05
Telefax +45 32 47 98 05

Deutschland
Du Pont de Nemours
(Deutschland) GmbH
Du Pont Straße 1
D-61343 Bad Homburg
Tel. +49 6172 87 0
Telefax +49 6172 87 27 01

Egypt
Du Pont Products S.A.
Bldg no. 6, Land #7, Block 1
New Maadi
ET-Cairo
Tel. +202 754 65 80
Telefax +202 516 87 81

España
Du Pont Ibérica S.A.
Edificio L'Ilia
Avda. Diagonal 561
E-08029 Barcelona
Tel. +34 227 60 00
Telefax +34 227 62 00

France
DuPont de Nemours (France) SAS
Défense Plaza
23/25 rue Delarivière Le Foullon
Défense 9
92 064 La Défense Cedex
Phone: +33 (0)1 41 97 44 00
Telefax +33 1 47 53 09 67

Hellas
Biesterfeld Hellas Intralink S.A.
Trading Establishment
149, AG, Triados Menidi Acharnes
GR-13671 Athens
Tel. +30 210 24 02 900
Telefax+30 210 24 02 141

Israël
Gadot Chemical Terminals (1985) Ltd.
16 Habonim Street
Netanya – South Ind. Zone
IL-42504 Netanya
Tel. +972 3 526 42 41
Telefax +972 3 528 27 17

Italia
Du Pont de Nemours Italiana S.r.L.
Centro Direzionale "Villa Fiorita"
Via Piero Gobetti, 2/A
20063 Cernusco s/N (MI)
Tel. +39 02 92629.1 (switchboard)
Fax +39 02 36049379

Magyarország
DuPont Magyarország Kft.
HU - 2040 Budaörs
Neuman J.u. 1
Tel. +36 23 509 400
Telefax: +36 23 509 432

Maroc
Deborel Maroc S.A.
40, boulevard d'Anfa – 10°
MA-Casablanca
Tel. +212 227 48 75
Telefax +212 226 54 34

Norway / Norge
Distrupol Nordic
Ostenssloveien 36
N-0677 Oslo
Tel. +47 23 16 80 62
Telefax +47 23 16 80 62

Österreich
Biesterfeld Interrowa GmbH & Co. KG
Bräuhausgasse 3-5
P.O. Box 19
AT-1051 Wien
Tel. +43 1 512 35 71-0
Fax +43 1 512 35 71-31
e-mail: info@interrowa.at
internet: www.interrowa.at

Polska
Du Pont Poland Sp. z o.o.
ul. Powazkowska 44C
PL-01-797 Warsaw
Tel. +48 22 320 0900
Telefax +48 22 320 0910

Portugal
Biesterfeld Iberica S.L.
Rua das Matas
P-4445-135 Alfena
Tel. +351 229 698 760
Telefax +351 229 698 769

Romania
Serviced by
Biesterfeld Interrowa GmbH & Co. KG.
See under Österreich.

Russia
DuPont Russia LLC.
ul. Krylatskaya 17/3
121614 Moscow
Tel. +7 495 797 22 00
Fax. +7 495 797 22 01

Schweiz / Suisse / Svizzera
Biesterfeld Plastic Suisse GmbH
Dufourstrasse 21
Postfach 14695
CH-4010 Basel
Tel. +41 61 201 31 50
Telefax +41 61 201 31 69

Slovenija
Serviced by
Biesterfeld Interrowa GmbH & Co. KG.
See under Österreich.

Suomi / Finland
Du Pont Suomi Oy
P.O. Box 54 (Keilaranta 12)
FI-02150 ESPOO
Tel: +358 207 890500
Fax: +358 207 890501

Sverige
Serviced by
Du Pont Danmark ApS.
See under Danmark.

Türkiye
Du Pont Products S.A.
Buyukdere Caddesi No. 122
Ozsezen Ismerkezi, A block, Kat: 3
Esentepe, 34394 Istanbul
Tel. +90 212 340 0400
Telefax +90 212 340 0430

Ukraine
Du Pont de Nemours
International S.A.
Representative Office
3, Glazunova Street
Kyiv 252042
Tel. +380 44 294 96 33 / 269 13 02
Telefax +380 44 269 11 81

United Kingdom
Du Pont (UK) Limited
Wedgwood Way
Stevenage
Hertfordshire SG1 4QN
Tel. +44 1438 734000
Telefax +44 1438 734109

South Africa
DuPont de Nemours
Societe Anonyme
South African Branch Office
4th Floor Outspan House
1006 Lenchen Avenue North
Centurion
Pretoria 0046
Tel. +27 0 12 683 5600
Telefax +27 0 12 683 5661

NORTH AMERICA

USA
DuPont Engineering Polymers
Barley Mill Plaza, Building 26
P. O. Box 800026
Wilmington, Delaware 19880
Tel. +1 302 992 4592
Telefax +1 302 992-6713

DuPont Automotive
950 Stephenson Highway
P.O. Box 7013
Troy, MI 48007-7013
Tel. +1 248 583-8000

Canada
DuPont Engineering Polymers
P.O. Box 2200
Streetsville, Mississauga
Ontario, Canada L5M 2H3
Tel. +1 905 821-5953

Mexico
DuPont S.A. de C.V.
Homero 206
Col. Chapultepec Morales
11570 Mexico D.F.
Tel. +525 557 221 000

SOUTH AMERICA

Argentina
Du Pont Argentina S.A.
Avda. Mitre y Calle 5
(1884) Berazategui-Bs.As.
Tel. +54 11 4239-3868
Telefax +54 11 4239-3817

Brasil
DuPont do Brasil S.A.
Al. Itapecuru, 506 Alphaville
06454-080 Barueri-Sao Paulo
Tel. + 5511 7266 8229

ASIA-PACIFIC

Australia
DuPont (Australia) Ltd.
168 Walker Street
North Sydney NSW 2060
Tel: +612 9923-6111
Fax: +612 9923 6011

Hong Kong/China
DuPont China Ltd.
26/F, Tower 6, The Gateway,
9 Canton Road
Tsimshatsui, Kowloon, Hong Kong
Tel: +852 2734 5345
Fax: +852 2724 4458

Shanghai/China
DuPont China Holding Co. Ltd.
15/F, Shui On Plaza
333 Huai Hai Road (Central)
Shanghai 200021
Tel: +86 21 6386 6366
Fax: +86 21 6386 6333

India
E.I. DuPont India Limited,
"Arihant Nitco Park" Sixth floor,
90, Dr. Radhakrishnan Salai,
Mylapore,
Chennai 600 004
Tel: +91 44 28472800
Fax: +91 44 28473800

Japan
DuPont Kabushiki Kaisha
Sanno Park Tower, 11-1
Nagata-cho 2-chome
Chiyoda-ku, Tokyo 100-6111
Japan.
Tel: +81 3 5521 8500
Fax: +81 3 5521 2595

Korea
DuPont (Korea) Ltd.
4/5 Floor, Asia Tower
#7/26, Yeoksam-dong, Kangnam-Ku
Seoul 135-082
Tel: +822 2222-5200
Fax: +822 2222-5470

Singapore
Du Pont Company (S) Pte Ltd
1 HarbourFront Place #11-01
HarbourFront Tower One
Singapore 098633
Tel: +65 6586 3688
Fax: +65 6272 7494

Taiwan
DuPont Taiwan Ltd.
Hung Kuo Building, 13th floor
#167 Tun Hwa North Road
Taipei 105
Tel: +8862 2719-1999
Fax: +8862 2719-0852

Thailand
DuPont (Thailand) Limited
6-7th Floor, M. Thai Tower
All Seasons Place
87 Wireless Road
Lumpini, Phatumwan
Bangkok 10330
Tel: +66 2 659 4000
Fax: +66 2 659 4001

CRASTIN® PBT
THERMOPLASTIC
POLYESTER RESIN

DELTRIN®
ACETAL RESIN

HYTREL®
THERMOPLASTIC
POLYESTER ELASTOMER

MINLON®
MINERAL REINFORCED
NYLON RESIN

RYNITE® PET
THERMOPLASTIC
POLYESTER RESIN

THERMX® PCT
HIGH PERFORMANCE POLYESTER

TYNEX®
NYLON MONOFILAMENT

VESPEL®
PARTS AND SHAPES

ZYTEL®
NYLON RESIN

ZYTEL® HTN
HIGH PERFORMANCE
POLYAMIDE

ZENITE® LCP
LIQUID CRYSTAL POLYMER

DUPONT® ETPV
THERMOPLASTIC RUBBER
THAT RESISTS OIL & HEAT

The DuPont Oval Logo, DuPont™, The miracles of science™, and Crastin®, Deltrin®, DuPont® ETPV, Hytrel®, Minlon®, Rynite®, Thermx®, Tynex®, Vespel®, Zytel®, Zenite® are registered trademarks or trademarks of DuPont or its affiliates.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill at their own discretion and risk. DuPont makes no warranties, express or implied, and assumes no liability in connection with any use of this information.

©2007 E.I. du Pont de Nemours and Company



The miracles of science™