


# ENGINEERING POLYMERS: THE 'TOP TEN' MOULDING PROBLEMS

By R. Wilkinson, Roger Wilkinson, E. A. Poppe, Karl Leidig, Karl Schirmer



## Chapter 3: Wrong Gate Position


1. Moisture in the granules
2. Feed system too small
3. Wrong gate position
4. Hold time too short
5. Wrong melt temperature
6. Wrong tool temperature
7. Poor surface finish
8. Problems with hot runners
9. Warpage
10. Mould deposit

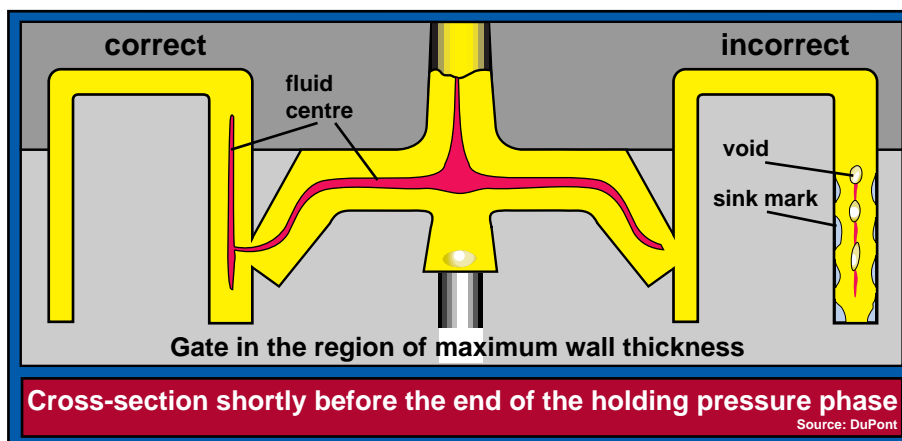

3.1

The position of the gate is decisive for the flow front profile and the effectiveness of the holding pressure and, as a result, for the strength and other properties of the moulded part.

Since the position of the gate is usually specified by designers and mould makers, this article has been written especially with these persons in mind. Nevertheless, injection moulders should be also involved from the planning stage, to prevent predictable problems.

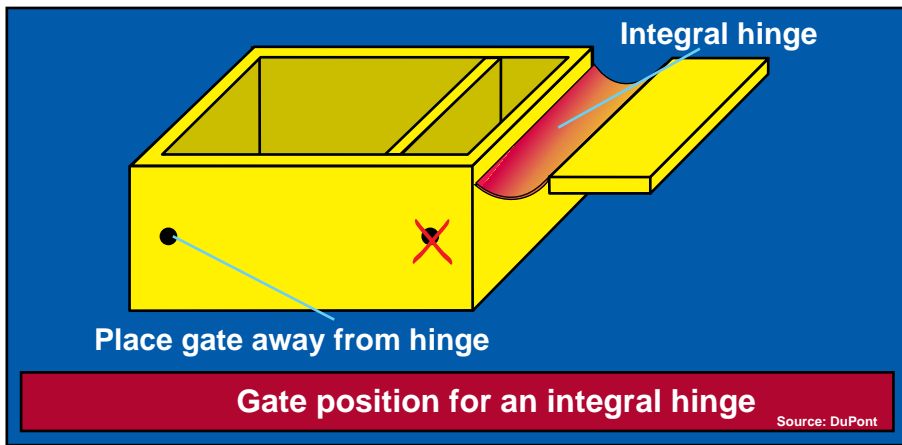

## Possible negative consequences of poor gate position

The properties of an otherwise correctly designed part made from a semi-crystalline engineering polymer can be ruined if the gate is not in the right position. This will be evident by the following symptoms, which apply to reinforced as well as unreinforced types of resin: weld lines and entrapped air, caused by the flow front profile, can influence the part's surface finish and, especially in the case of fibre-reinforced materials, its mechanical properties. Modifying processing conditions has no influence on these considerations.

Sink marks and voids are formed in the thick-walled part of a moulding if the gate is located in a thinner part of the moulding. Since the material crystallises sooner in the thin-walled section (see diagram), the thick-walled section, which requires a longer holding pressure time, can no longer be supplied with melt. Besides optical and mechanical problems, there will be increased shrinkage in that area, which can cause warping even in the case of unreinforced grades.


If the gates are too few and incorrectly positioned, flow distances can be too long and injection fill pressures too high. If the available mould locking force is insufficient or a polymer is being used which has low viscosity and crystallises too slowly, this can result in increased flash formation. Furthermore, the processing 'window' is greatly limited, so that it is no longer possible to fine-adjust tolerances via moulding conditions.

## Recommendations for optimum gate position


- Always try to gate into the region with the greatest wall thickness.
- Gates should never be near highly stressed areas.
- Long parts should be gated longitudinally instead of transversely or centrally, if at all possible, especially in the case of reinforced moulding compounds.
- If there are two or more mould cavities, the parts should be arranged and gated symmetrically in relation to the sprue.
- Axially symmetrical parts such as gear-wheels, discs, impellers, etc., should preferably be centrally gated using a diaphragm gate, or by resorting to multiple gating with a three-plate mould, in order to achieve good true running properties.
- Parts which include integral hinges should be gated so that the weld line will be away from the hinge. Flow stoppages near the hinges should be avoided at all costs.
- Cup-shaped parts (e.g. small housings, capacitor cups, etc.) should be gated near the base, so as to prevent air entrapment.
- In the case of tubular parts, the melt should first be made to fill the annular circumference at one end and then fill the length of the tube itself. This will prevent an asymmetrical flow front profile.
- When insert-moulding around core pins, melt-out cores and other metal inserts, the molten resin should be able to flow round the insert in a circle, so as to keep misalignment of the insert to a minimum.
- Exposed surfaces which have to be free from visual defects such as gate marks can be gated from the underside, using a tunnel gate feeding onto an ejector pin.

- The gate should be positioned so that even brief flow front stoppages (complex parts, multi-cavity moulds with different shapes, etc.) during filling are prevented as far as possible.

These recommendations obviously cannot cover the entire range of possible applications. Compromises will always have to be made, depending on the complexity of a particular moulding. The recommendations we have discussed should nevertheless be taken into account during the planning stage, as far as possible. Simulated mould filling trials can be an invaluable aid in such situations

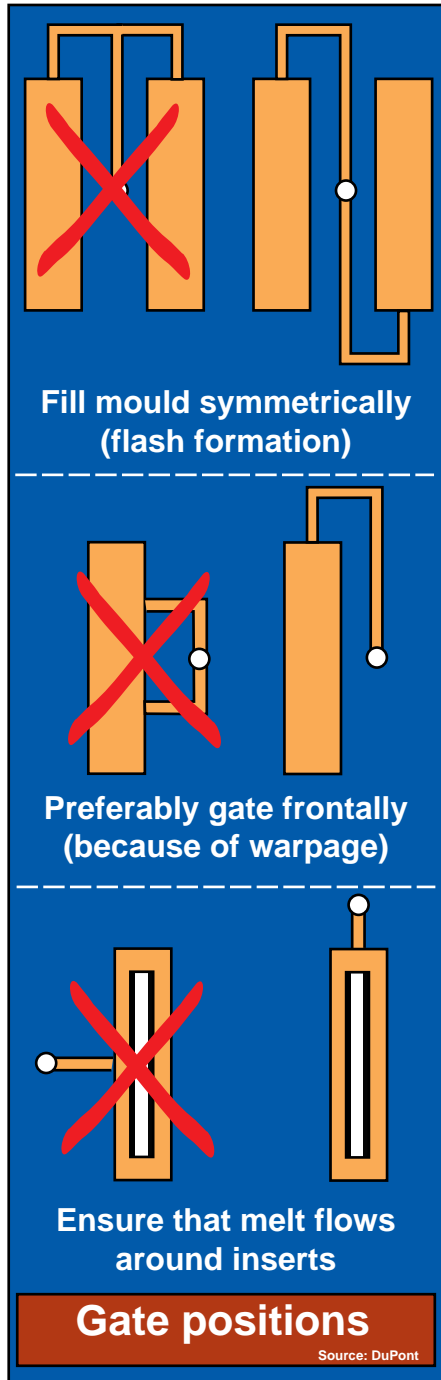

3.3

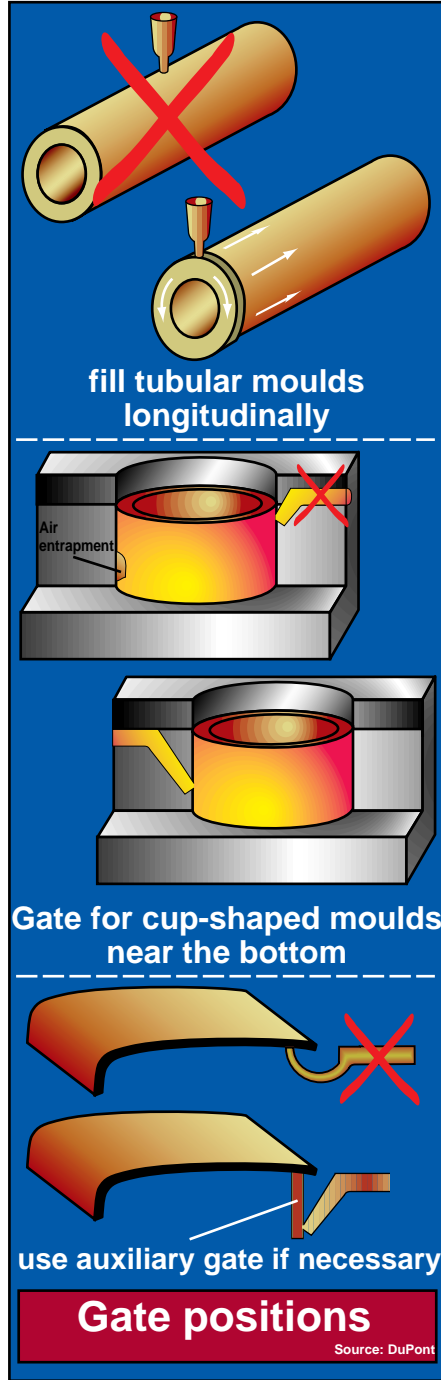

3.4

**EUROPE/MIDDLE EAST/AFRICA**

Belgique / België  
Du Pont de Nemours (Belgium)  
Antoon Spinoystraat 6  
B-2800 Mechelen  
Tel. +32 15 44 14 11  
Telefax +32 15 44 14 09

Bulgaria  
Serviced by  
Biesterfeld Interrowa GmbH & Co. KG.  
See under Österreich.

Ceská Republika a  
Slovenská Republika  
Du Pont CZ, s.r.o.  
Pekarska 14/268  
CZ-155 00 Praha 5 – Jinonice  
Tel. +42 257 41 41 11  
Telefax +42 257 41 41 50-51

Danmark  
Du Pont Danmark ApS  
Skjøtevej 26  
P.O. Box 3000  
DK-2770 Kastrup  
Telefax +45 32 47 98 05  
Telefax +45 32 47 98 05

Deutschland  
Du Pont de Nemours  
(Deutschland) GmbH  
Du Pont Straße 1  
D-61343 Bad Homburg  
Tel. +49 6172 87 0  
Telefax +49 6172 87 27 01

Egypt  
Du Pont Products S.A.  
Bldg no. 6, Land #7, Block 1  
New Maadi  
ET-Cairo  
Tel. +202 754 65 80  
Telefax +202 516 87 81

España  
Du Pont Ibérica S.A.  
Edificio L'Ilia  
Avda. Diagonal 561  
E-08029 Barcelona  
Tel. +34 227 60 00  
Telefax +34 227 62 00

France  
DuPont de Nemours (France) SAS  
Défense Plaza  
23/25 rue Delarivière Le Foullon  
Défense 9  
92 064 La Défense Cedex  
Phone: +33 (0)1 41 97 44 00  
Telefax +33 1 47 53 09 67

Hellas  
Biesterfeld Hellas Intralink S.A.  
Trading Establishment  
149, AG, Triados Menidi Acharnes  
GR-13671 Athens  
Tel. +30 210 24 02 900  
Telefax +30 210 24 02 141

Israël  
Gadot Chemical Terminals (1985) Ltd.  
16 Habonim Street  
Netanya – South Ind. Zone  
IL-42504 Netanya  
Tel. +972 3 526 42 41  
Telefax +972 3 528 27 17

Italia  
Du Pont de Nemours Italiana S.r.L.  
Centro Direzionale "Villa Fiorita"  
Via Piero Gobetti, 2/A  
20063 Cernusco s/N (MI)  
Tel. +39 02 92629.1 (switchboard)  
Fax +39 02 36049379

Magyarország  
DuPont Magyarország Kft.  
HU - 2040 Budaörs  
Neuman J.u. 1  
Tel. +36 23 509 400  
Telefax: +36 23 509 432

Maroc  
Deborel Maroc S.A.  
40, boulevard d'Anfa – 10°  
MA-Casablanca  
Tel. +212 227 48 75  
Telefax +212 226 54 34

Norway / Norge  
Distrupol Nordic  
Ostenssloveien 36  
N-0677 Oslo  
Tel. +47 23 16 80 62  
Telefax +47 23 16 80 62

Österreich  
Biesterfeld Interrowa GmbH & Co. KG  
Bräuhausgasse 3-5  
P.O. Box 19  
AT-1051 Wien  
Tel. +43 1 512 35 71-0  
Fax +43 1 512 35 71-31  
e-mail: info@interrowa.at  
internet: www.interrowa.at

Polska  
Du Pont Poland Sp. z o.o.  
ul. Powazkowska 44C  
PL-01-797 Warsaw  
Tel. +48 22 320 0900  
Telefax +48 22 320 0910

Portugal  
Biesterfeld Iberica S.L.  
Rua das Matas  
P-4445-135 Alfena  
Tel. +351 229 698 760  
Telefax +351 229 698 769

Romania  
Serviced by  
Biesterfeld Interrowa GmbH & Co. KG.  
See under Österreich.

Russia  
DuPont Russia LLC.  
ul. Krylatskaya 17/3  
121614 Moscow  
Tel. +7 495 797 22 00  
Fax. +7 495 797 22 01

Schweiz / Suisse / Svizzera  
Biesterfeld Plastic Suisse GmbH  
Dufourstrasse 21  
Postfach 14695  
CH-4010 Basel  
Tel. +41 61 201 31 50  
Telefax +41 61 201 31 69

Slovenija  
Serviced by  
Biesterfeld Interrowa GmbH & Co. KG.  
See under Österreich.

Suomi / Finland  
Du Pont Suomi Oy  
P.O. Box 54 (Keilaranta 12)  
FI-02150 ESPOO  
Tel. +358 207 890500  
Fax: +358 207 890501

Sverige  
Serviced by  
Du Pont Danmark ApS.  
See under Danmark.

Türkiye  
Du Pont Products S.A.  
Buyukdere Caddesi No. 122  
Ozsezen Ismerkezi, A block, Kat: 3  
Esentepe, 34394 Istanbul  
Tel. +90 212 340 0400  
Telefax +90 212 340 0430

Ukraine  
Du Pont de Nemours  
International S.A.  
Representative Office  
3, Glazunova Street  
Kyiv 252042  
Tel. +380 44 294 96 33 / 269 13 02  
Telefax +380 44 269 11 81

United Kingdom  
Du Pont (UK) Limited  
Wedgwood Way  
Stevenage  
Hertfordshire SG1 4QN  
Tel. +44 1438 734000  
Telefax +44 1438 734109

South Africa  
DuPont de Nemours  
Societe Anonyme  
South African Branch Office  
4th Floor Outspan House  
1006 Lenchen Avenue North  
Centurion  
Pretoria 0046  
Tel. +27 0 12 683 5600  
Telefax +27 0 12 683 5661

**NORTH AMERICA**

USA  
DuPont Engineering Polymers  
Barley Mill Plaza, Building 26  
P. O. Box 800026  
Wilmington, Delaware 19880  
Tel. +1 302 992 4592  
Telefax +1 302 992-6713

DuPont Automotive  
950 Stephenson Highway  
P.O. Box 7013  
Troy, MI 48007-7013  
Tel. +1 248 583-8000

Canada  
DuPont Engineering Polymers  
P.O. Box 2200  
Streetsville, Mississauga  
Ontario, Canada L5M 2H3  
Tel. +1 905 821-5953

Mexico  
DuPont S.A. de C.V.  
Homero 206  
Col. Chapultepec Morales  
11570 Mexico D.F.  
Tel. +52 555 575 221 000

**SOUTH AMERICA**

Argentina  
Du Pont Argentina S.A.  
Avda. Mitre y Calle 5  
(1884) Berazategui-Bs.As.  
Tel. +54 11 4239-3868  
Telefax +54 11 4239-3817

Brasil  
DuPont do Brasil S.A.  
Al. Itapecuru, 506 Alphaville  
06454-080 Barueri-Sao Paulo  
Tel. +5511 7266 8229

**ASIA-PACIFIC**

Australia  
DuPont (Australia) Ltd.  
168 Walker Street  
North Sydney NSW 2060  
Tel: +612 9923-6111  
Fax: +612 9923 6011

Hong Kong/China  
DuPont China Ltd.  
26/F, Tower 6, The Gateway,  
9 Canton Road  
Tsimshatsui, Kowloon, Hong Kong  
Tel: +852 2734 5345  
Fax: +852 2724 4458

Shanghai/China  
DuPont China Holding Co. Ltd.  
15/F., Shui On Plaza  
333 Huai Hai Road (Central)  
Shanghai 200021  
Tel: +86 21 6386 6366  
Fax: +86 21 6386 6333

India  
E.I. DuPont India Limited,  
"Arihant Nitco Park" Sixth floor,  
90, Dr. Radhakrishnan Salai,  
Mylapore,  
Chennai 600 004  
Tel: +91 44 28472800  
Fax: +91 44 28473800

Japan  
DuPont Kabushiki Kaisha  
Sanno Park Tower, 11-1  
Nagata-cho 2-chome  
Chiyoda-ku, Tokyo 100-6111  
Japan.  
Tel: +81 3 5521 8500  
Fax: +81 3 5521 2595

Korea  
DuPont (Korea) Ltd.  
4/5 Floor, Asia Tower  
#726, Yeoksam-dong, Kangnam-Ku  
Seoul 135-082  
Tel: +822 2222-5200  
Fax: +822 2222-5470

Singapore  
Du Pont Company (S) Pte Ltd  
1 HarbourFront Place #11-01  
HarbourFront Tower One  
Singapore 098633  
Tel: +65 6586 3688  
Fax: +65 6272 7494

Taiwan  
DuPont Taiwan Ltd.  
Hung Kuo Building, 13th floor  
#167 Tun Hwa North Road  
Taipei 105  
Tel: +8862 2719-1999  
Fax: +8862 2719-0852

Thailand  
DuPont (Thailand) Limited  
6-7th Floor, M. Thai Tower  
All Seasons Place  
87 Wireless Road  
Lumpini, Phatumwan  
Bangkok 10330  
Tel: +66 2 659 4000  
Fax: +66 2 659 4001

**CRASTIN® PBT**  
THERMOPLASTIC  
POLYESTER RESIN

**DELTRIN®**  
ACETAL RESIN

**HYTREL®**  
THERMOPLASTIC  
POLYESTER ELASTOMER

**MINLON®**  
MINERAL REINFORCED  
NYLON RESIN

**RYNITE® PET**  
THERMOPLASTIC  
POLYESTER RESIN

**THERMX® PCT**  
HIGH PERFORMANCE POLYESTER

**TYNEX®**  
NYLON MONOFILAMENT

**VESPEL®**  
PARTS AND SHAPES

**ZYTEL®**  
NYLON RESIN

**ZYTEL® HTN**  
HIGH PERFORMANCE  
POLYAMIDE

**ZENITE® LCP**  
LIQUID CRYSTAL POLYMER

**DUPONT® ETPV**  
THERMOPLASTIC RUBBER  
THAT RESISTS OIL & HEAT

*The DuPont Oval Logo, DuPont™, The miracles of science™, and Crastin®, Deltrin®, DuPont® ETPV, Hytrel®, Minlon®, Rynite®, Thermx®, Tynex®, Vespel®, Zytel®, Zenite® are registered trademarks or trademarks of DuPont or its affiliates.*

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill at their own discretion and risk. DuPont makes no warranties, express or implied, and assumes no liability in connection with any use of this information.

©2007 E.I. du Pont de Nemours and Company



The miracles of science™