


NEW DUPONT THERMALLY CONDUCTIVE POLYMERS DRIVING AL DIE-CASTING REPLACEMENT AND PART INTEGRATIONS

Unique Combination of Thermal Conductivity, Mechanical Properties and Electrical Insulation

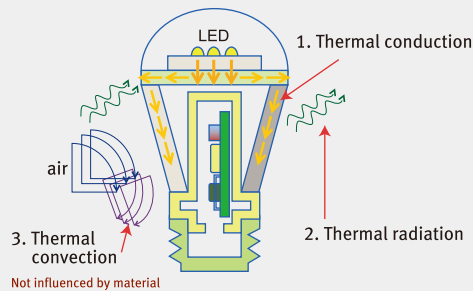

	Al alloy	TC-resin	Normal resin
Thermal conductivity (W/m.K)	high	middle	low
Thermal radiation	low	high	high

Fig 1: Types of Thermal transfer in LED bulbs.

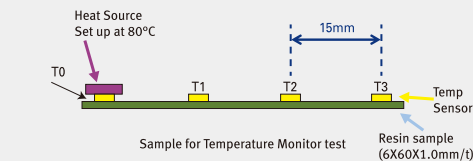
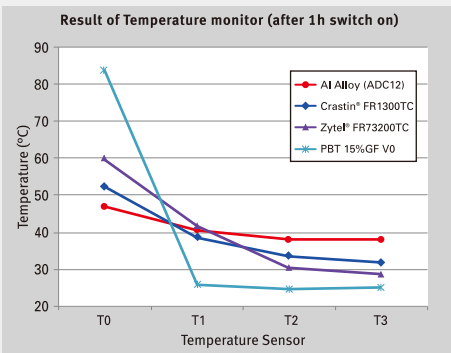


Fig. 2: Heat transfer comparison of TC polymers vs Standard PBT and Al Alloy.
Note: Higher temp on T1, T2 and T3 means better heat transfer performance.
Ideal case : T0=T1=T2=T3 Internal test done at DuPont Technical Center.

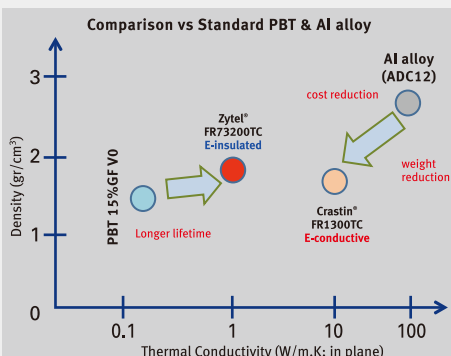


Fig 3: Thermal Conductivity and Density comparison of TC polymers vs Standard PBT and Al Alloy.

MARKET TRENDS

Due to the miniaturization and increasing power of microelectronics, heat dissipation is key to the reliability, performance and further miniaturization of microelectronics. Materials with high thermal conductivity are required for the conduction of heat for the purpose of cooling.

In applications where thermal conductivity is the limiting factor, metals remain the favored materials. However, in the many applications where convection is the limiting factor, thermally conductive plastics are increasing the preferred choice.

WHY THERMALLY CONDUCTIVE POLYMERS ARE NEEDED?

Striking a good balance between Thermal Conductivity (TC) and thermal radiation, thermally conductive polymer technology encourages metal replacement and part integration to help reduce the total cost and lower device weight. It facilitates the development of energy-efficient systems with concern for environment sustainability. (refer to Fig.1)

THERMALLY AND ELECTRICALLY CONDUCTIVE

Crastin® FR1300TC BK350

Electrically conductive PBT grade, V-0, High Thermal Conductivity (14 W/m.K, in-plane), low density, black colour, good balance of mechanical properties, for injection moulding.

THERMALLY CONDUCTIVE & ELECTRICALLY INSULATED

Zytel® FR73200TC WT001

Electrically insulated PA 6 grade, V-0, Thermal Conductivity (2 W/m.K, in-plane), white colour, F1 (suitable for outdoor applications), good balance of mechanical properties, for injection moulding.

FEATURES AND BENEFITS:

vs Al Alloys

- Potential cost and weight reduction
- Design flexibility enables part integration

vs Standard non TC resins

- Higher heat transfer which is translated into higher efficiency and lifetime of the final device

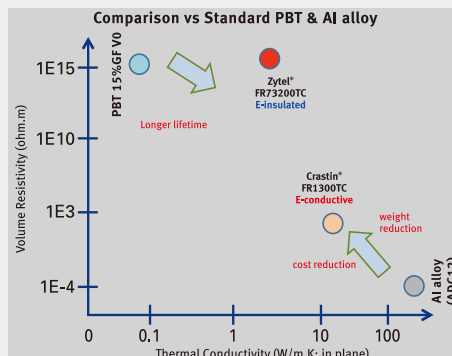


Fig 4: Thermal Conductivity and Volume Resistivity comparison of TC polymers vs Standard PBT and Al Alloy.

NEW DUPONT THERMALLY CONDUCTIVE POLYMERS DRIVING AL DIE-CASTING REPLACEMENT AND PART INTEGRATIONS

Thermally Conductive DuPont Performance Polymers for TC Applications

			PROPERTIES				
Grade	Colour	Polymer Type	Thermal Conductivity in Plane (mm)	Volume Resistivity	Flammability Rating (mm)	GWIT (mm)	Density
Method			ASTM E1461	IEC 60093	UL 94	IEC 60695-2-13	ISO 1183
Units			W/m.K	Ohm.m		°C	gr/cm ³
Crastin® FR1300TC BK350	Black	PBT	14 (0.3)	>1E3	V0 (0.75)	675 (0.75) 750 (1.5) 960 (3.0)	1.58
Zytel® FR73200TC WT001	White	PA6	2 (0.3)	2.8E15	V0 (0.75)	775 (0.75) 800 (1.5) 825 (3.0)	1.80

* Thermally conductive specimen prepared by hot-press.

EXAMPLES OF POTENTIAL APPLICATIONS

- LED Lighting (e.g. bulb cover, driver casing)
- Hand Held Devices (e.g. laptops/tablets bottom covers)
- Battery (e.g. casing)
- Electrical Components (e.g. motor housings)
- LCD Projectors (e.g. heat sink)
- Auto Lighting (e.g. heat sink)
- PV Converters (e.g. terminal block)

WE CAN HELP

DuPont is strongly committed to expansion and investment in environmentally friendly solutions. Please contact the DuPont representative in your country or global region to discuss how we can work together.

For more information on DuPont Performance Polymers :

North America

DuPont Performance Polymers
Wilmington, Delaware
Tel +1 302 999-4592

South America

DuPont do Brasil, S.A.
Barueri, Sao Paulo
Tel +55 11 4166 8531/8647

China

DuPont China Holding Co, Ltd
Shanghai - P.R. China
Tel +86-400-888-0256

Japan

DuPont Kabushiki Kaisha
Chiyoda-ku, Tokyo, Japan
Tel +81-3 5521 8500

EMEA

DuPont Performance Polymers
Grand- Saconnex,
Geneva, Switzerland
Tel +41 22 717 51 11

plastics.dupont.com

Copyright © 2015 DuPont. The DuPont Oval Logo, DuPont™, Crastin® and Zytel® are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

DuPont (NYSE: DD) has been bringing world-class science and engineering to the global marketplace in the form of innovative products, materials, and services since 1802. The company believes that by collaborating with customers, governments, NGOs, and thought leaders we can help find solutions to such global challenges as providing enough healthy food for people everywhere, decreasing dependence on fossil fuels, and protecting life and the environment. For additional information about DuPont and its commitment to inclusive innovation, please visit www.dupont.com.

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise. The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.